

18-344 Recitation 4

Lab1 - Branch Prediction

Logistical Notes

Logistical Notes

- Lab1 due 9/25/2024
 - Released 9/16/2024
- Partnered lab
- Lab1 builds off the infrastructure setup in Lab0
 - Pintool
 - Runcpu
 - SPEC2017

Version Control

- We recommend using some version control system such as git
- If you choose to backup your code to a cloud service such as GitHub
PLEASE MAKE SURE IT IS PRIVATE

Collaboration Tools

- You can share files over the afs space by creating a shared directory (see: <https://github.com/CMU-18240/240-How-to/wiki/Configuring-AFS-folder-permissions-with-FS>)
- If you are using git, you might also collaborate via a cloud system like github.
- Teletype (VScode, other 'smart' editors)
- Partner Program

Getting Started

- Starter code at: `/afs/ece.cmu.edu/class/ece344/assign/lab1.tar.gz`
- Extract into your private class folder using: `tar -xvzf <file_name>.tar.gz`
- Read `handout.txt` for Lab1 implementation and deliverable details

Goals

- Implement four branch outcome prediction algorithms that we learned in class and compare their accuracy and implementation complexity
- The branch predictors that you will implement are:
 - Static predictor (e.g., always-taken or always-not-taken)
 - Bimodal / saturating counter predictor
 - Two-level (e.g., GAp or PAg) predictor
 - GShare predictor
- You will implement `predict()`, `update()`, and any other necessary functionality for four branch predictors (we recommend implementing these in the existing `bp.cpp` file)

Lab1 Knobs

- Found in bp_main.cpp:

```
KNOB<std::string> KnobOutFile(KNOB_MODE_WRITEONCE, "pintool",
    "o", "br_pred.stats", "output filename to store results in");

/*These knobs are examples that you may find helpful; you may find that you need to add others, too*/
KNOB<std::string> KnobBPType(KNOB_MODE_WRITEONCE, "pintool",
    "b", "static", "specify branch predictor type");

KNOB<unsigned long> KnobBHTSize(KNOB_MODE_WRITEONCE, "pintool",
    "bht", "4096", "specify BHT size in entries (as applicable)");

KNOB<unsigned long> KnobGHTSize(KNOB_MODE_WRITEONCE, "pintool",
    "ght", "4096", "specify GHT size in entries (as applicable)");
```

- Refer to [Recitation 2](#) for additional Knob details

Implementation Tips

Your code will run every time a branch is encountered in the program

- Keep your code light weight
- In general, avoid C++ data structures like Hash, Map and Queue
 - Most of these are AVL trees (remember that from 15122?)
 - These AVL trees will rebalance after every call
- Stick to C arrays and you should be able to keep your code quick and efficient

Testing Infrastructure

- Lab0 should have ironed out all the issues but let's double check
- The static predictor (always taken) is already implemented in the starter code
- Lets try running the pintool
 - First need to run `make` to generate pintool (.so file)
 - Remember to run `make` every time you edit the source files

Testing Infrastructure - edit run.sh/py

- We need to change run.sh/py to point to the new lab1 files as well as set knobs when calling the pintool

```
# Lab 1 - Branch Prediction (Simple setup)

# Set Knobs
BP="static"
BHT_SIZE="4096"
GHT_SIZE="4096"

# Make results folder
cd ${LAB_PATH}
mkdir -p results/${BP}
cd -

# Set results file and call pin
RESULT_FILE="${LAB_PATH}/results/${BP}/${BENCHMARK}.stats"
pin -t ${PINTOOL} -o ${RESULT_FILE} -b ${BP} -bht ${BHT_SIZE} -ght ${GHT_SIZE} -- ${COMMAND}
```

Testing Infrastructure - call runcpu

- Command:

```
runcpu -c /afs/ece.cmu.edu/class/ece344/opt/spec2017/config/18344-f22-<andrewid>.cfg  
--action=onlyrun--noreportable --size=test <selected-benchmark-suite>
```

- There should now be stats in the results folder for the static branch predictor

```
Scheme: static  
Total: 2222875  
Mispredicted: 1297724  
Rate: 0.416196
```

Advanced edits to run.sh

- You will want to automate the process of selecting knob {b, bht, ght} values
- Example which iterates over each BP type (keeping bht, ght constant)

```
# Lab 1 - Branch Prediction (Advanced setup example)
BP_TYPE=("static" "bimodal" "twolevel" "gshare")
BHT_SIZE="4096"
GHT_SIZE="4096"

for BP in "${BP_TYPE[@]}"
do
    # NOTE: create results folder if it doesn't exist
    cd ${LAB_PATH}
    mkdir -p results/${BP}
    cd -

    RESULT_FILE="${LAB_PATH}/results/${BP}/${BENCHMARK}.stats"
    pin -t ${PINTOOL} -o ${RESULT_FILE} -b ${BP} -bht ${BHT_SIZE} -ght ${GHT_SIZE} -- ${COMMAND}
done
```

- Note: You could have several nested for loops iterating over different knob values

The same thing, but in Python!

```
import os
import sys

benchmark = sys.argv[1]
command = ' '.join(sys.argv[2:])

dir344 = '/afs/ece.cmu.edu/usr/andrewID/private/18344/'
dirlab = dir344 + 'lab1/'

pintool = os.path.join( dirlab + 'obj-intel64/', 'bp_pintool.so' )

bp_arr = ['static', 'bimodal', 'gshare', 'twolevel']
ght_sizes = ['4096']
bht_sizes = ['4096']

for bp in bp_arr:
    for ght in ght_sizes:
        for bht in bht_sizes:
            result_file = os.path.join(dirlab + 'results/', benchmark + '.csv')
            bpoptions = '-b %s -bht %s -ght %s' % (bp, bht, ght)
            options = '-o %s %s' % (result_file, bpoptions) # , l2options)
            pin_cmd = 'pin -t %s %s -- %s' % (pintool, options , command)
            os.system(pin_cmd)
```

Outputting Data

The default outputs aren't exactly scalable

```
602.gcc_s_bimodal_1024_1024.stats 605.mcf_s_bimodal_1024_1024.stats 620.omnetpp_s_bimodal_1024_1024.stats 623.xalancbmk_s_bimodal_1024_1024.stats 625.x264_s_bimodal_1024_1024.stats
602.gcc_s_bimodal_16384_16384.stats 605.mcf_s_bimodal_16384_16384.stats 620.omnetpp_s_bimodal_16384_16384.stats 623.xalancbmk_s_bimodal_16384_16384.stats 625.x264_s_bimodal_16384_16384.stats
602.gcc_s_bimodal_2048_2048.stats 605.mcf_s_bimodal_2048_2048.stats 620.omnetpp_s_bimodal_2048_2048.stats 623.xalancbmk_s_bimodal_2048_2048.stats 625.x264_s_bimodal_2048_2048.stats
602.gcc_s_bimodal_256_256.stats 605.mcf_s_bimodal_256_256.stats 620.omnetpp_s_bimodal_256_256.stats 623.xalancbmk_s_bimodal_256_256.stats 625.x264_s_bimodal_256_256.stats
602.gcc_s_bimodal_4096_4096.stats 605.mcf_s_bimodal_4096_4096.stats 620.omnetpp_s_bimodal_4096_4096.stats 623.xalancbmk_s_bimodal_4096_4096.stats 625.x264_s_bimodal_4096_4096.stats
602.gcc_s_bimodal_512_512.stats 605.mcf_s_bimodal_512_512.stats 620.omnetpp_s_bimodal_512_512.stats 623.xalancbmk_s_bimodal_512_512.stats 625.x264_s_bimodal_512_512.stats
602.gcc_s_bimodal_64_64.stats 605.mcf_s_bimodal_64_64.stats 620.omnetpp_s_bimodal_64_64.stats 623.xalancbmk_s_bimodal_64_64.stats 625.x264_s_bimodal_64_64.stats
602.gcc_s_bimodal_8192_8192.stats 605.mcf_s_bimodal_8192_8192.stats 620.omnetpp_s_bimodal_8192_8192.stats 623.xalancbmk_s_bimodal_8192_8192.stats 625.x264_s_bimodal_8192_8192.stats
602.gcc_s_gshare_1024_1024.stats 605.mcf_s_gshare_1024_1024.stats 620.omnetpp_s_gshare_1024_1024.stats 623.xalancbmk_s_gshare_1024_1024.stats 625.x264_s_gshare_1024_1024.stats
602.gcc_s_gshare_16384_16384.stats 605.mcf_s_gshare_16384_16384.stats 620.omnetpp_s_gshare_16384_16384.stats 623.xalancbmk_s_gshare_16384_16384.stats 625.x264_s_gshare_16384_16384.stats
602.gcc_s_gshare_2048_2048.stats 605.mcf_s_gshare_2048_2048.stats 620.omnetpp_s_gshare_2048_2048.stats 623.xalancbmk_s_gshare_2048_2048.stats 625.x264_s_gshare_2048_2048.stats
602.gcc_s_gshare_256_256.stats 605.mcf_s_gshare_256_256.stats 620.omnetpp_s_gshare_256_256.stats 623.xalancbmk_s_gshare_256_256.stats 625.x264_s_gshare_256_256.stats
602.gcc_s_gshare_4096_4096.stats 605.mcf_s_gshare_4096_4096.stats 620.omnetpp_s_gshare_4096_4096.stats 623.xalancbmk_s_gshare_4096_4096.stats 625.x264_s_gshare_4096_4096.stats
602.gcc_s_gshare_512_512.stats 605.mcf_s_gshare_512_512.stats 620.omnetpp_s_gshare_512_512.stats 623.xalancbmk_s_gshare_512_512.stats 625.x264_s_gshare_512_512.stats
602.gcc_s_gshare_64_64.stats 605.mcf_s_gshare_64_64.stats 620.omnetpp_s_gshare_64_64.stats 623.xalancbmk_s_gshare_64_64.stats 625.x264_s_gshare_64_64.stats
602.gcc_s_gshare_8192_8192.stats 605.mcf_s_gshare_8192_8192.stats 620.omnetpp_s_gshare_8192_8192.stats 623.xalancbmk_s_gshare_8192_8192.stats 625.x264_s_gshare_8192_8192.stats
602.gcc_s_static_4096_4096.stats 605.mcf_s_static_4096_4096.stats 620.omnetpp_s_static_4096_4096.stats 623.xalancbmk_s_static_4096_4096.stats 625.x264_s_static_4096_4096.stats
602.gcc_s_twolevel_1024_16.stats 605.mcf_s_twolevel_1024_16.stats 620.omnetpp_s_twolevel_1024_16.stats 623.xalancbmk_s_twolevel_1024_16.stats 625.x264_s_twolevel_1024_16.stats
602.gcc_s_twolevel_16_1024.stats 605.mcf_s_twolevel_16_1024.stats 620.omnetpp_s_twolevel_16_1024.stats 623.xalancbmk_s_twolevel_16_1024.stats 625.x264_s_twolevel_16_1024.stats
602.gcc_s_twolevel_32_32.stats 605.mcf_s_twolevel_32_32.stats 620.omnetpp_s_twolevel_32_32.stats 623.xalancbmk_s_twolevel_32_32.stats 625.x264_s_twolevel_32_32.stats
602.gcc_s_twolevel_32_512.stats 605.mcf_s_twolevel_32_512.stats 620.omnetpp_s_twolevel_32_512.stats 623.xalancbmk_s_twolevel_32_512.stats 625.x264_s_twolevel_32_512.stats
602.gcc_s_twolevel_512_32.stats 605.mcf_s_twolevel_512_32.stats 620.omnetpp_s_twolevel_512_32.stats 623.xalancbmk_s_twolevel_512_32.stats 625.x264_s_twolevel_512_32.stats
602.gcc_s_twolevel_64_64.stats 605.mcf_s_twolevel_64_64.stats 620.omnetpp_s_twolevel_64_64.stats 623.xalancbmk_s_twolevel_64_64.stats 625.x264_s_twolevel_64_64.stats
```

Outputting Data cont'd

Choose a data format you like!

```
out << "{" << std::endl;
out << "\"total accesses\": " << L1->total_accesses << ", " << std::endl;
out << "\"misses\": " << L1->misses << ", " << std::endl;
out << "\"hits\": " << L1->hits << /*", " << */std::endl;
out << "\"L2 total accesses\": " << L2->total_accesses << ", " << std::endl;
out << "\"L2 misses\": " << L2->misses << ", " << std::endl;
out << "\"L2 hits\": " << L2->hits << std::endl;
out << "}" << std::endl;
```

Like json

```
std::ofstream out;
out.open(KnobOutFile.Value().c_str(), std::ios_base::app);

//Output your results here
out << KnobBPType.Value() << ", ";
out << KnobGHTSize.Value() << ", ";
out << KnobBHTSize.Value() << ", ";
out << total << ", ";
out << mispred << ", ";
out << ( 1.0 - ( (float)(mispred) / (float)(total) ) ) << std::endl;

out.close();
```



Or csv

Nb: this file appends data instead of just replacing

Visualizing Results

Choose a graphing systems

- Your favorite spreadsheet software (e.g. Google Sheets or Excel)
- Plotting tools like Matplotlib
 - You can use scientific notebooks like Jupyter notebook
- Matlab???

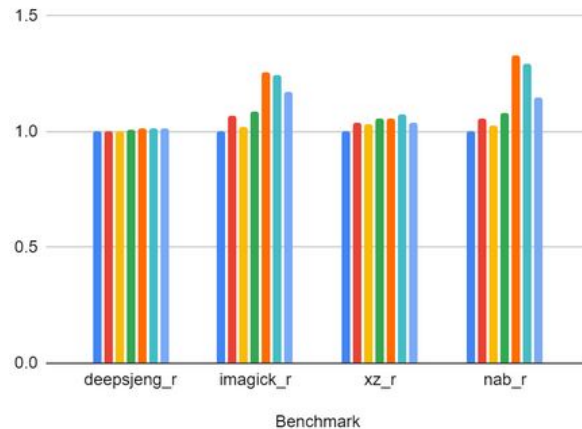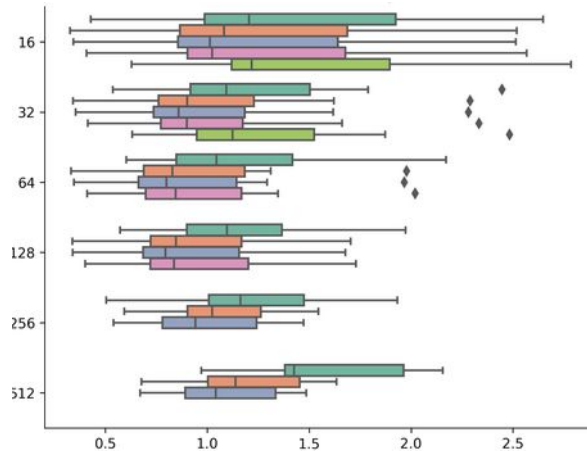

Branch Predictor Review